



Technische Beschreibung und Daten



- Montierbare M12 Zentral - und Winkelstecker
- Mit Schraubklemmen als Anschlussart bis max. 0,75 mm²
- Kabelverschraubung PG 7 für Ø 4 - 6 mm
- Kabelverschraubung PG 9 für Ø 6 - 8 mm
- Kunststoff, Metall oder VA-Edelstahl Überwurfmutter möglich
- IP 67 im verschraubten Zustand
- Temperaturbereich: -40°C/+85°C
- Werkstoffe
 - Gehäuse: PBT (UL 94 V-0)
 - Kontaktträger: PA 66 (UL 94 HB)
 - Kontakte: CuZn, Oberfläche=Optaloy
 - Überwurfmutter: CuZn vernickelt
- Bemessungsspannung
 - 4 pol.: 250V AC / 300V DC
 - 5 pol.: 125V AC / 150V DC
- Strombelastbarkeit
 - 4 + 5 pol.: 4 A @ 40°C
- Isolationsgruppe: C nach VDE 0110

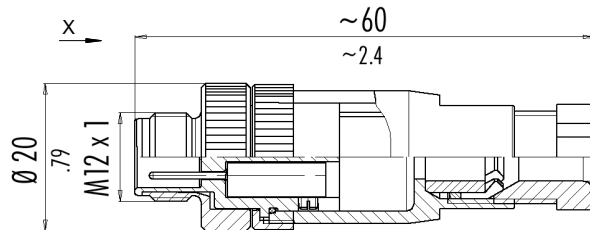

Technical description and data

- Male plug straight and angle, assembly possible
- For connection screw clamps for max. 0,75 mm²
- Screw-up housing cable fixation PG 7 for Ø 4 - 6 mm
- Screw-up housing cable fixation PG 9 for Ø 6 - 8 mm
- Plastic, metal or stainless steel locking nut possible
- IP 67 in fully locked position
- Temperature range: -40°C/+85°C
- Materials
 - Housing: PBT (UL 94 V-0)
 - Moulded body: PA 66 (UL 94 HB)
 - Contacts: CuZn, plating=Optaloy
 - Locking nut: CuZn nickel-plated
- Reference voltage
 - 4 pol.: 250V AC / 300V DC
 - 5 pol.: 125V AC / 150V DC
- Rated current
 - 4 + 5 pol.: 4 A @ 40°C
- Isolation group: C acc. VDE 0110

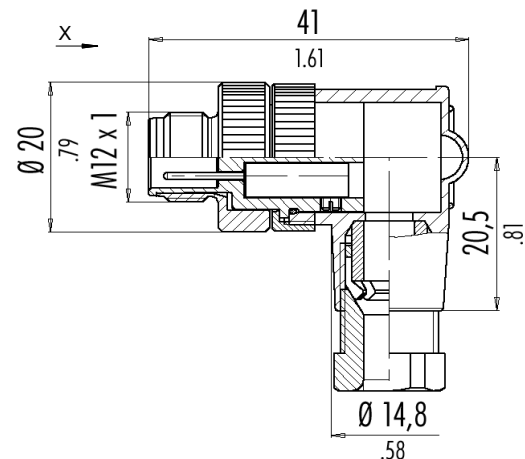

Polzahl Poles	Ansicht X View X	Gehäuseform* Form of housing*	Gehäusematerial* Material of housing*	Überwurfmutter* Locking nut*	Kabel Ø *	Kurzbezeich. Abbreviation	Artikel-Nr. Part-No.
4		Zentral / straight	PBT , schwarz / black	CuZn vernickelt	4-6mm	ZSM4M	HTK-09 7490 40
		Winkel / angle	PBT , schwarz / black	CuZn vernickelt	4-6mm	WSM4M	HTK-09 7491 40
5		Zentral / straight	PBT , schwarz / black	CuZn vernickelt	4-6mm	ZSM5M	HTK-09 7490 50
		Winkel / angle	PBT , schwarz / black	CuZn vernickelt	4-6mm	WSM5M	HTK-09 7491 50

Bemerkungen:

* Andere Typen auf Anfrage

Notes:

* Other types on request

Entwurfstatus:
Draft-state:
04.12.2003

Datenblatt: Zentral / Winkel-Stecker, montierbar
Data sheet: Male plug straight / angle, assembly possible

ZSxM/WSxM